


STRAIGHT PATTERN STRAINERS PN40 DN15 – DN200

Strainers with mesh type insert are designed to protect piping installations from mechanical pollution. They are produced as type: **ZFF1**.

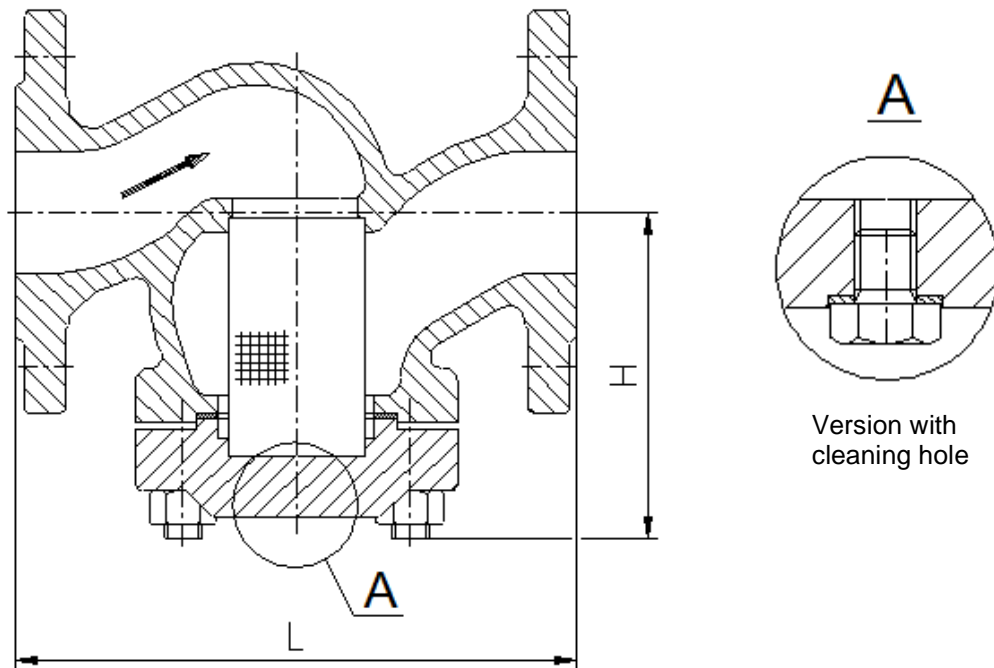

Materials

Part name	Material		
Body	GP240GH	G17CrMo5-5	GX5CrNiMo19-11-2
Bonnet	GP240GH	G17CrMo5-5	GX5CrNiMo19-11-2
Gasket	camprofile gasket with graphite		
Basket	1.4571		

Dimensions and weights

DN	15	20	25	32	40	50	65	80	100	125	150	200
L	130	150	160	180	200	230	290	310	350	400	480	600
H	72	80	85	110	125	132	160	182	206	223	246	286
Weight /kg/	3,4	3,9	4,4	8,4	19,5	14	22	28,5	39	54	71	134

End connections

- Flange with raised face - type B1
- Buttweld end

Dimensions of end connections

- Flanges PN 40 acc. to EN 1092-1
- Buttwelding ends in acc. EN 12627

Pressure – temperature rating – see table 1.

Additional information

Product meets requirements of Directive PED: 2014/68/EU.

For client's request, strainers can be made in version with cleaning hole.

Acceptance tests: EN 12266-1.

Face to face dimension: series 1 acc. to EN 558.

Special versions on client's request are available.